

WASTE STABILIZATION POND

This system uses a pond to treat the liquid after it is discharged from a septic tank. These systems can be an alternative to subsurface systems where poor soils exist. After treatment, the liquid is discharged from the pond.


Advantages

Inexpensive system to install
 Low maintenance, pump septic tank every 3-5 years, mow banks of pond

Disadvantages

Large area for required for construction
 Creates an attractive nuisance for children and pets, should be fenced

PLAN VIEW

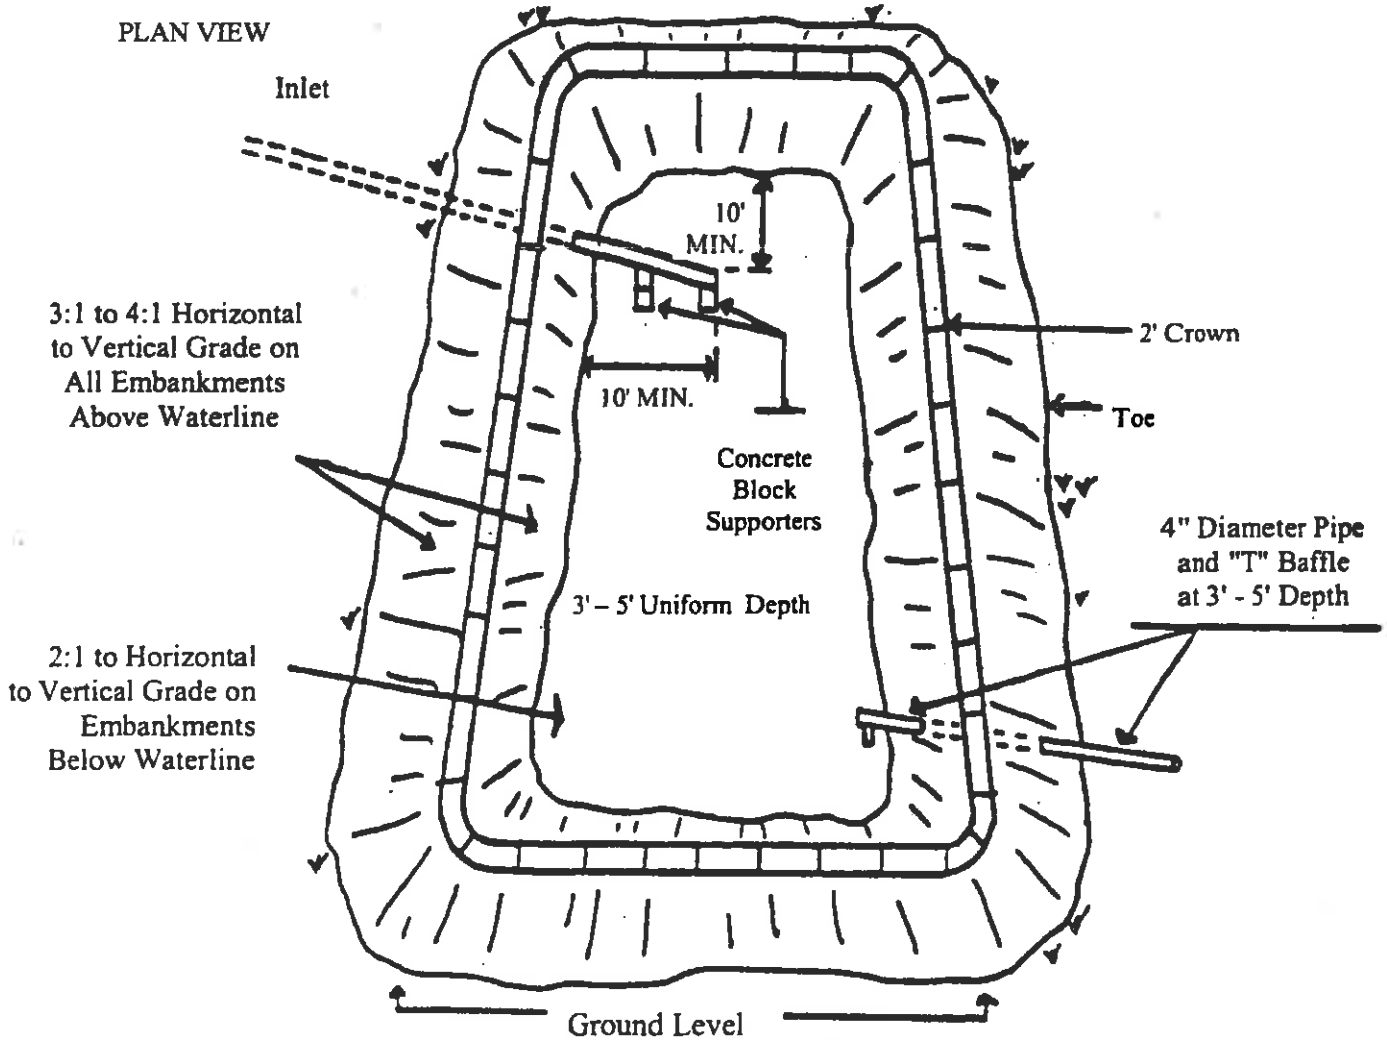

SECTION VIEW

